

FIG. 1

FIG. 2A is a perspective view of a first embodiment of a device 200. The device 200 includes a base 201 and a handle 202. The base 201 is configured to receive a sample 203. The handle 202 is configured to move the sample 203 relative to the base 201. The device 200 is configured to analyze the sample 203.

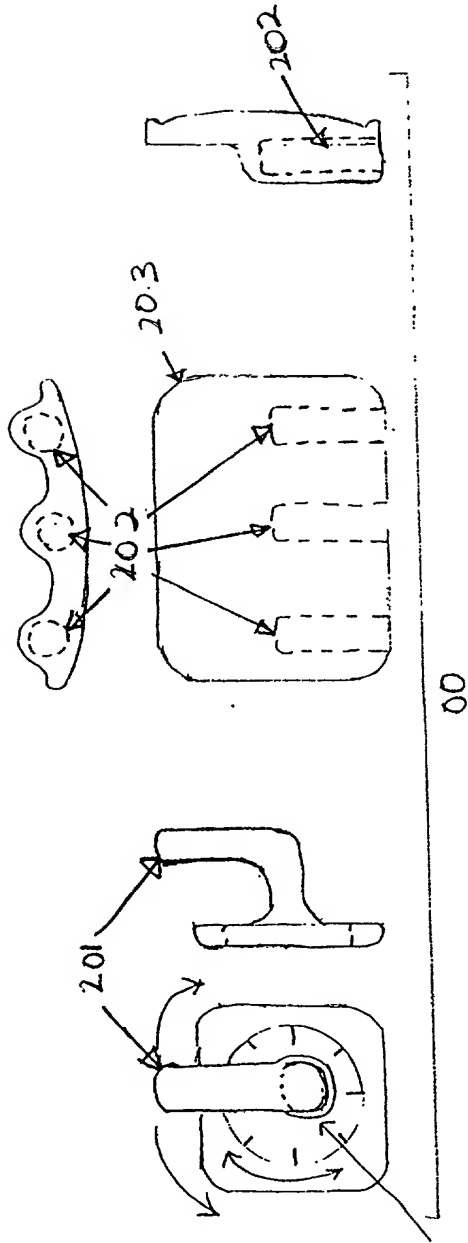


FIG. 2A

FIG. 2

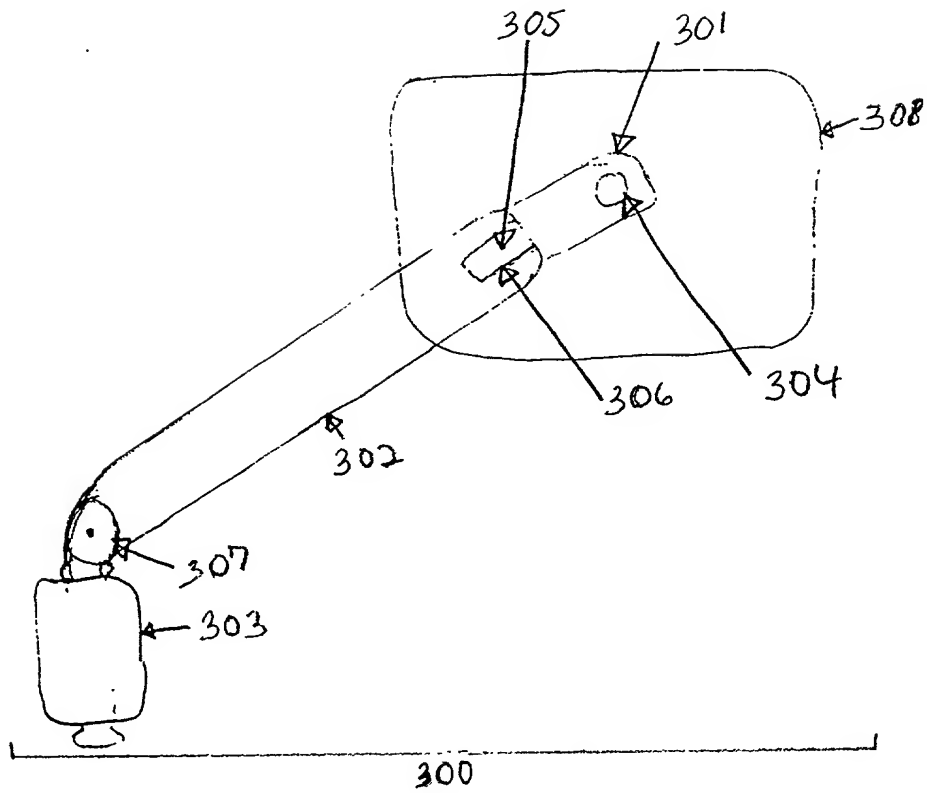


FIG. 3




FIG. 3A




FIG. 3C

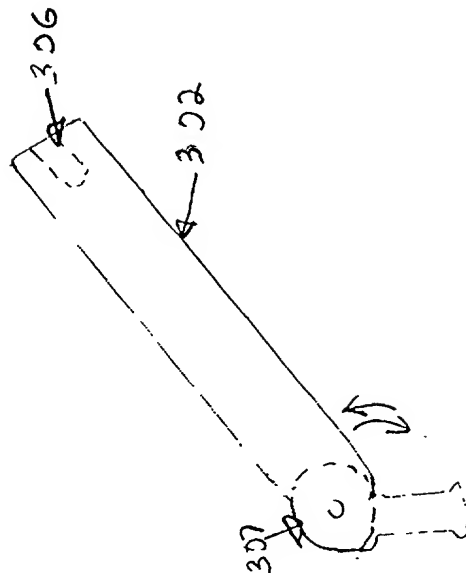


FIG. 3B